



CUSHMAN®

SHUTTLE™ 2



DELIVERS MORE THAN HARD WORK.

When you need to move large materials around your facility in a hurry, the Cushman® Shuttle™ 2 is the right choice. With a 1,200-pound cargo capacity and a 20.9-square-foot cargo deck, it can move anything from lumber to luggage. And whether it's equipped with a 48V DC electric drivetrain or a 13.5 hp Kawasaki® gas engine, the Shuttle 2 offers plenty of power to get the job done right.

LET'S WORK.®


13.5HP
KAWASAKI®
GAS ENGINE
OPTION

48V
ELECTRIC
DRIVETRAIN
OPTION

20.9 SQ FT
CARGO DECK
CAPACITY



CUSHMAN® SHUTTLE™ 2

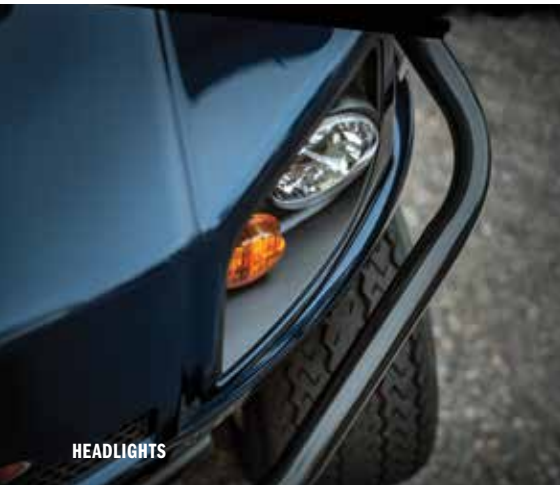

HEADLIGHTS



BENCH SEATING

RACK-AND-PINION
STEERING

OPTIONS & ACCESSORIES

- Drop Side Rails
- Locking Glove Box
- Rear View Mirror
- Windshield
- Canopy
- Front Disc Brakes
- Pin Stripes
- Body Color (Forest Green, White or Custom Options)
- Turn Signal with Four-Way Flashers
- Strobe Lights
- Beacon Light Kit
- Dome and Work Lights
- LED Headlights
- Hour Meter
- High Altitude Jetting
- Fuse Cab
- Steel Cab and Doors
- Defroster
- Wheel Covers - Spoke and Chrome
- Limited Slip Differential



COVERED WITH THE 2-YEAR CUSHMAN
CARE TOTAL PROTECTION WARRANTY

ELECTRIC MODEL

GAS MODEL

BODY & CHASSIS	
FRAME	Welded Steel w/ DuraShield™ Powder Coat
BODY & FINISH	Injection Molded TPO (Front) / Steel Base Coat/Clear Coat (Rear)
STANDARD COLOR	Patriot Blue
DIMENSIONS	
OVERALL LENGTH	141.0 in (358 cm)
OVERALL WIDTH	48.5 in (123 cm)
OVERALL HEIGHT	48.6 in (123 cm) (w/o Roof) / 72.0 in (183 cm) (w/ Struts & Roof)
WHEEL BASE	93.5 in (237 cm)
WHEEL TRACK	34.2 in (87 cm) Front / 38.0 in (97 cm) Rear
GROUND CLEARANCE	4.3 in (11 cm) / 4.75 in (12 cm)
CARGO DECK CAPACITY	20.9 sq ft (1.94 m²) / N/A
POWER	
POWER SOURCE	48V DC / 4-Cycle, 24.5 ci (401cc) Low Emission
VALVE TRAIN	N/A / Single Cylinder OHV
HORSEPOWER (KW)	18.1 hp (13.5 kW) @ 1900 rpm / 13.5 hp (10.1 kW) Exceeds SAE J1940 Std.
ELECTRICAL SYSTEM	48V / Starter/Generator. Solid State Reg.
BATTERY (QTY/TYPE)	Eight, 6V Deep Cycle / One, 12V Maintenance Free
BATTERY CHARGER	48 V, 120V AC, UL/CSA / N/A
KEY OR PEDAL START	Pedal
AIR CLEANER	N/A / Industrial Rated Dry Filter
LUBRICATION	N/A / Pressurized Oil System
OIL FILTER	N/A / Spin-On
COOLING SYSTEM	N/A / Air Cooled
FUEL CAPACITY	N/A / 6 Gallon (22.7 L) Tank
SPEED CONTROLLER	400 Amp Precision Drive System (PDS) / N/A
DRIVE TRAIN	Motor Shaft Direct Drive / Continuously Variable Transmission
TRANSAXLE	Differential w/ Helical Gears
GEAR SELECTION	Dash-Mounted Forward-Neutral-Reverse / Forward - Reverse
REAR AXLE RATIO	14.7:1 / 11.42:1(Forward) 15.78:1(Reverse)
PERFORMANCE	
SEATING CAPACITY	2-Person
WEIGHT W/O BATTERIES	810 lb (367 kg) / 926 lb (420 kg)
CURB WEIGHT	1300 lb (590 kg) / N/A
VEHICLE LOAD CAPACITY	1000 lb (454 kg) / 1200 lb (544 kg)
OUTSIDE CLEARANCE CIRCLE	25.5 ft (7.8 m) / N/A
SPEED	13 mph ± 0.5 mph (21 kph ± 0.8kph) / 16 mph ± 0.5 mph (26 kph ± 0.8 kph)
STEERING & SUSPENSION	
STEERING	Self-Compensating Rack & Pinion
SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
SERVICE BRAKE	Rear Wheel Mechanical, Self-Adjusting Drum
PARKING BRAKE	Self-Compensating, Single-Point Engagement
TIRES (FRONT & REAR)	Links 18 x 8.5 - 8 (4 Ply Rated)

www.cushman.com

©2018 Textron Specialized Vehicles Inc.
Features and specifications of the vehicles are subject to change without notice.
Vehicle as photographed may include options not included on base model.

82282-G4 (Rev. 08/2018)